


FSA-8 Fire System Annunciator

Quick Reference Guide

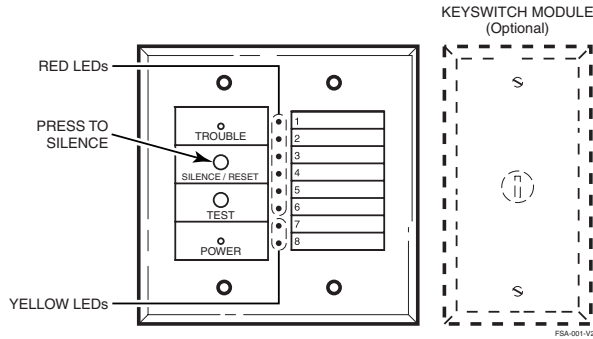

SILENCE / RESET SWITCH

First Press

- Silences the FSA's local sounder.
- Silences the local sounder and silences the System Notification Appliances.

Second Press

- Resets the Control Panel, Smoke Detectors, and Notification Appliances.
- No affect.

Note to Installer - Please check options enabled.

KEYSWITCH (not programmable):

First Activation - Silences the System Notification Appliances including the FSA's local sounder.

Second Activation - Resets the Control Panel, Smoke Detectors, and Notification Appliances.

Indicators

LED	STATE	INDICATION
Green (POWER)	Steady	AC power applied.
	Off	AC power loss.
Yellow (TROUBLE)	Off	Normal state.
	Steady	System trouble detected or any fire-related trouble.
	Flashing	Panel communication loss. Call for service immediately. Zone or zone list in check or trouble. Flashes in sync with zone (red or yellow) LED.
Red (Zone) and Yellow (Fire Supervisory Zone)	Off	Normal state.
	Steady	Zone or zone list faulted or in alarm.
	Flashing	Zone or zone list in check or trouble. Flashes in sync with TROUBLE (yellow) LED.

Switches

SWITCH	FUNCTION
TEST	When pressed, sequentially lights all zone (red) LEDs to demonstrate operability.
SILENCE/RESET	When pressed, initiates sequence dependent upon programmed options. All options silence sounder for a period not to exceed 24 hrs.

Sounder

CONDITION	INDICATION
Sound steadily	Zone or zone list in alarm. Sound remains until manually silenced, locally or remotely, by user.
Beep rapidly	System/Zone in trouble.



K4267V3 5/06 Rev. A

Honeywell